

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP04/053447

International filing date: 14 December 2004 (14.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: EP
Number: 03293224.6
Filing date: 18 December 2003 (18.12.2003)

Date of receipt at the International Bureau: 09 March 2005 (09.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches
Patentamt**

**European
Patent Office**

PCT/EP200 4 / 0 5 3 4 4 7

**Office européen
des brevets**

14 DEC 2004

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03293224.6

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

1. The first part of the document is a list of the names of the members of the committee.

2. The second part of the document is a list of the names of the members of the committee.



Anmeldung Nr:
Application no.: 03293224.6
Demande no:

Anmeldetag:
Date of filing: 18.12.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

DEUTSCHE THOMSON-BRANDT GMBH
Hermann-Schwer-Strasse 3
78048 Villingen-Schwenningen
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and device for transcoding n-bit words into m-bit words with m n

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G09G3/28

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

METHOD AND DEVICE FOR TRANSCODING N-BIT WORDS INTO M-BIT WORDS WITH $M < N$

5 The present invention concerns a method for transcoding a N bits word into a M bits word with $M < N$. The invention is applicable in various fields and more particularly in the display field.

Background

10 The invention will be described in the field of the plasma display device. This transcoding method is used after a degamma function in a display receiver. Figure 1 is a standard implementation circuit for encoding video data into subfield data. This circuit comprises a first memory 100 comprising 1024 x 12 bits for handling 10 bits video data $YI[9:0]$. A first look up table is stored in the memory 100 and used for remapping these data as described in EP
15 patent application No. 1 353 314 for implementing the metacode concept or in EP patent application No 1 256 954 for implementing a Gravity Center Coding. At the output of the memory 100, 12 bits video signal $YA[11:0]$ is obtained. The available 12-bits correspond to 8-bits integer resolution and 4-bits fractional resolution. Then, the 12-bits of video signal $YA [11-0]$ are
20 forwarded to a dithering circuit 110. In this circuit 110, the 4-bits of fractional resolution are added with the 4-bits of dithering and then truncated.

The video signal $YB[7,0]$ from the circuit 110 is then forwarded to a second memory 120 comprising 256 x 16 bits. A second look-up table is stored in the memory 120 and is used for transforming the data $YB[7:0]$ into
25 subfield data $SF[15:0]$.

Until now, a degamma function is implemented in the look-up table of the memory 100. Currently, much more bits (typically 16 bits) are needed after a degamma function than the video input has. So, if the degamma function is made before the memory 100, this memory must have
30 more inputs (16 bits), which will drastically increase the size of this memory. To go from 10 to 16 bits, the size of the memory is multiplied by 64.

Otherwise, if a user wants to change the value of the degamma, to use a different degamma for each color or to use a specific degamma function, a specific look-up table should be generated for each case (if the degamma function can be known) and all of them should be stored.

5 For these reasons, it is necessary to separate the degamma function from the look-up table of the memory 100 and to create a transcoding circuit for transcoding 16 bits data (coming for example from a degamma block) into 10 bits data.

10 An object of the invention is to propose a method for transcoding a N bits word into a M bits word, $N > M$.

Invention

15 The invention concerns a method for transcoding a N bits word into a M bits word, $N > M$, characterized in that it comprises the following steps :

- breaking down the N bits word into an exponent part and a mantissa part having each a size which varies according to the value of said N bits word, the size of the mantissa part increasing with the value of said N bits word, and
- 20 - encoding the exponent part of the N bits word into a variable number of bits A and removing, if need be, least significant bits of the mantissa part in order to obtain a mantissa with a variable number of bits B, with $A+B=M$.

25 The invention concerns also a device for transcoding a N bits word into a M bits word, $N > M$, characterized it comprises

- means for breaking down the N bits word into an exponent part and a mantissa part having each a size which varies according to the value of said N bits word, the size of the mantissa part increasing with the value of
- 30 said N bits word, and
- means for encoding the exponent part of the N bits word into a variable number of bits A and removing, if need be, least significant bits of the mantissa part in order to obtain a mantissa with a variable number of bits B, with $A+B=M$.

35

It concerns also a Plasma display panel comprising a degamma means for applying a degamma function to video input data and delivering N bits data and a mapping memory for remapping M bits data, with $N > M$ characterized in that it comprises a transcoding device as above.

5

drawings

Exemplary embodiments of the invention are illustrated in the drawings and are explained in more detail in the following description, the drawings showing in :

- 10 Fig.1 a block diagram of a standard means for encoding video data into subfield data; and
Fig.2 a block diagram of a means for encoding video data into subfield data with an transcoding block according to the invention;

15 exemplary embodiments

The method is described for transcoding a 16 bits word into a 10 bits word. As this transcoding method is used after a degamma function, the Least Significant Bits of a 16 bits word representing a high value are not
20 important because high values do not require as much precision as low values. In the same manner, the Most Significant Bits of a 16 bits word representing a low level are not necessary because low values do not require as many bits as high values.

For example, for a 16 bits word, values inferior to 256 do not need
25 more than 8 bits to be encoded without loss of accuracy and values superior to 1024 do not need to have a 1-bit precision. Consequently, some bits of the word could be saved.

According to the invention; each value is defined by a mantissa and an exponent. So, the 10 bit word comprises a mantissa part and an exponent
30 part. The idea of the invention is to use a reduced number of bits for the mantissa.

Basically, it is used 8 bits for the mantissa part, except for the smallest values for which less bits are used. In fact, it is equivalent to use for the mantissa part more bits (up to 16) for the small values and less for the
35 biggest ones (down to 8).

An example of such a conversion is given below. In this example, the 65536 16-bits input values are converted into 1024 output values (10 bits). The 16-bits values can be classified as following :

5	1XXXXXXXXXXXXXXXXX	32768<value<65535
	01XXXXXXXXXXXXXXXX	16384<value<32767
	001XXXXXXXXXXXXXXXX	8162<value<16383
	0001XXXXXXXXXXXXXX	4096<value<8161
	00001XXXXXXXXXXXXX	2048<value<4095
10	000001XXXXXXXXXXXX	1024<value<2047
	0000001XXXXXXXXXXX	512<value<1023
	00000001XXXXXXXXXX	256<value<511
	000000001XXXXXXXXX	128<value<255
	0000000001XXXXXXXx	64<value<127
15	000000000001XXXXXX	32<value<63
	000000000000XXXXXX	0<value<31

According to the invention, the small x (symbolizing indifferently zeros or ones) on the right part are lost bits and the zeros and ones on the left side are information which are preserved by an encoding (they are defined by the exponent). The big x (symbolizing indifferently zeros or ones) are bits which are preserved as they are in the 16-bit word and are not encoded.

The transcoding operation can be illustrated by the two following table. The left table corresponds to the 16 bits words and the right table corresponds to the 10 bits words.

30	1XXXXXXXXXXXXXXXXX	→	111XXXXXXXX
	01XXXXXXXXXXXXXXXX	→	110XXXXXXXX
	001XXXXXXXXXXXXXXXX	→	101XXXXXXXX
	0001XXXXXXXXXXXXXX	→	100XXXXXXXX
	00001XXXXXXXXXXXXX	→	011XXXXXXXX
35	000001XXXXXXXXXXXX	→	010XXXXXXXX
	0000001XXXXXXXXXXX	→	0011XXXXXXX
	00000001XXXXXXXXXX	→	0010XXXXXXX
	000000001XXXXXXXx	→	00011XXXXXX
	00000000001XXXXXXx	→	00010XXXXXX
	000000000001XXXXXX	→	00001XXXXXX
	000000000000XXXXXX	→	00000XXXXXX

In this example,

- the numbers between 32768 and 65535 are encoded with 7 original bits (32768 input values to 128 output values); the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 16384 and 32767 are encoded with 7 original bits (16384 input values to 128 output values); the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 8192 and 16383 are encoded with 7 bits (8192 input values to 128 output values); the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 4096 and 8191 are encoded with 7 original bits (4096 input values to 128 output values) ; the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 2048 and 4095 are encoded with 7 original bits (2048 input values to 128 output values) ; the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 1024 and 2047 are encoded with 7 original bits (1024 input values to 128 output values); the mantissa comprises 7 bits and the exponent comprises 3 bits.
- the numbers between 512 and 1023 are encoded with 6 original bits (512 input values to 64 output values) ; the mantissa comprises 6 bits and the exponent comprises 4 bits.
- the numbers between 256 and 511 are encoded with 6 original bits (256 input values to 64 output values) ; the mantissa comprises 6 bits and the exponent comprises 4 bits.
- the numbers between 128 and 255 are encoded with 5 original bits (128 input values to 32 output values) ; the mantissa comprises 5 bits and the exponent comprises 5 bits.
- the numbers between 64 and 127 are encoded with 5 original bits (64 input values to 32 output values) ; the mantissa comprises 5 bits and the exponent comprises 5 bits.
- the numbers between 32 and 63 are encoded with 5 original bits (32 input values to 32 output values) ; the mantissa comprises 5 bits and the exponent comprises 5 bits.

- the numbers between 0 and 31 are encoded with 5 original bits (32 input values into 32 output values); the mantissa comprises 5 bits and the exponent comprises 5 bits.

- 5 This encoding is done with some logic elements as indicated below. In[15:0] is the 16 bits word to be encoded and out [9:0] is the 10 bit word.

```

    if( in[15] == 1 )
        out[9:7] = 7
10      out[6:0] = in[14:8]
    else if( in[14] == 1 )
        out[9:7] = 6
        out[6:0] = in[13:7]
    else if( in[13] == 1 )
15      out[9:7] = 5
        out[6:0] = in[12:6]
    else if( in[12] == 1 )
        out[9:7] = 4
        out[6:0] = in[11:5]
20      out[9:7] = 3
        out[6:0] = in[10:4]
    else if( in[10] == 1 )
        out[9:7] = 2
25      out[6:0] = in[9:3]
    else if( in[9] == 1 )
        out[9:6] = 3
        out[5:0] = in[8:3]
    else if( in[8] == 1 )
30      out[9:6] = 2
        out[5:0] = in[7:2]
    else if( in[7] == 1 )
        out[9:5] = 3
        out[4:0] = in[6:2]
35      out[9:5] = 2
        out[4:0] = in[5:1]
```

```

else if( in[5] == 1 )
    out[9:5] = 1
    out[4:0] = in[4:0]
else
5    out[9:5] = 0
    out[4:0] = in[4:0]

```

This transcoding method is implemented by a transcoding block 90
 inserted a degamma block 80 delivering 16 bits data and the memory 100 as
 10 illustrated by figure 2. Of course, in this circuit, the look-up table of the
 memory 100 does not include the degamma function.

15

CLAIMS

1. Method for transcoding a N bits word into a M bits word, $N > M$, characterized in that it comprises the following steps :

5 - breaking down the N bits word into an exponent part and a mantissa part having each a size which varies according to the value of said N bits word, the size of the mantissa part increasing with the value of said N bits word, and

10 - encoding the exponent part of the N bits word into a variable number of bits A and removing, if need be, least significant bits of the mantissa part in order to obtain a mantissa with a variable number of bits B, with $A+B=M$.

15 2. Device for transcoding a N bits word into a M bits word, $N > M$, characterized it comprises

 - means for breaking down the N bits word into an exponent part and a mantissa part having each a size which varies according to the value of said N bits word, the size of the mantissa part increasing with the value of said N bits word, and

20 - means for encoding the exponent part of the N bits word into a variable number of bits A and removing, if need be, least significant bits of the mantissa part in order to obtain a mantissa with a variable number of bits B, with $A+B=M$.

25 3. Plasma display panel comprising a degamma means (80) for applying a degamma function to video input data ($Y[9:0]$) and delivering N bits data and a mapping memory (100) for remapping M bits data, with $N > M$ characterized in that it comprises a transcoding device according to claim 2.

30

ABSTRACT**METHOD AND DEVICE FOR TRANSCODING N-BIT WORDS
INTO M-BIT WORDS WITH $M < N$**

5

The present invention concerns a method for transcoding a N bits word into a M bits word with $M < N$. The invention is applicable in various fields and more particularly in the display field. The method comprises the following steps :

10

- breaking down the N bits word into an exponent part and a mantissa part having each a size which varies according to the value of said N bits word, the size of the mantissa part increasing with the value of said N bits word, and

15

- encoding the exponent part of the N bits word into a variable number of bits A and removing, if need be, least significant bits of the mantissa part in order to obtain a mantissa with a variable number of bits B, with $A+B=M$.

1/1

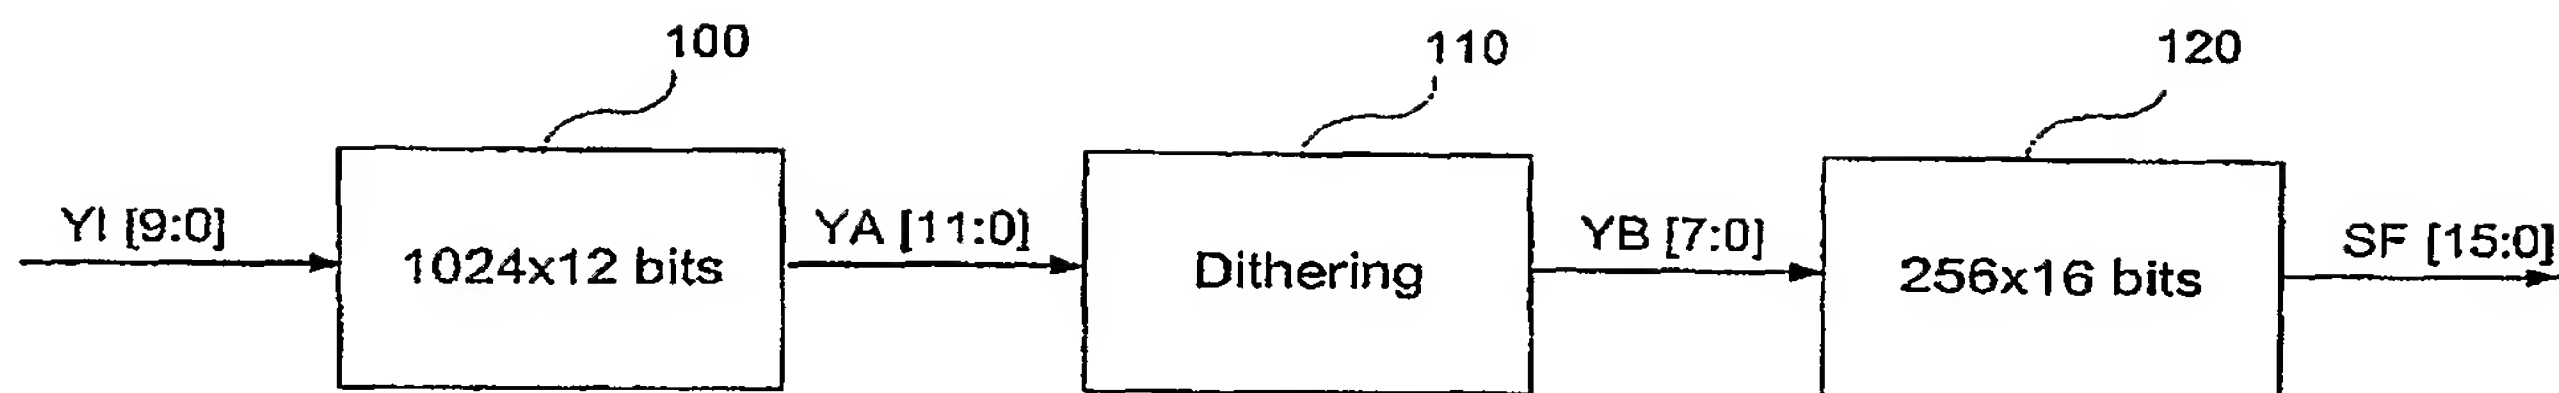


FIG.1 (Prior art)

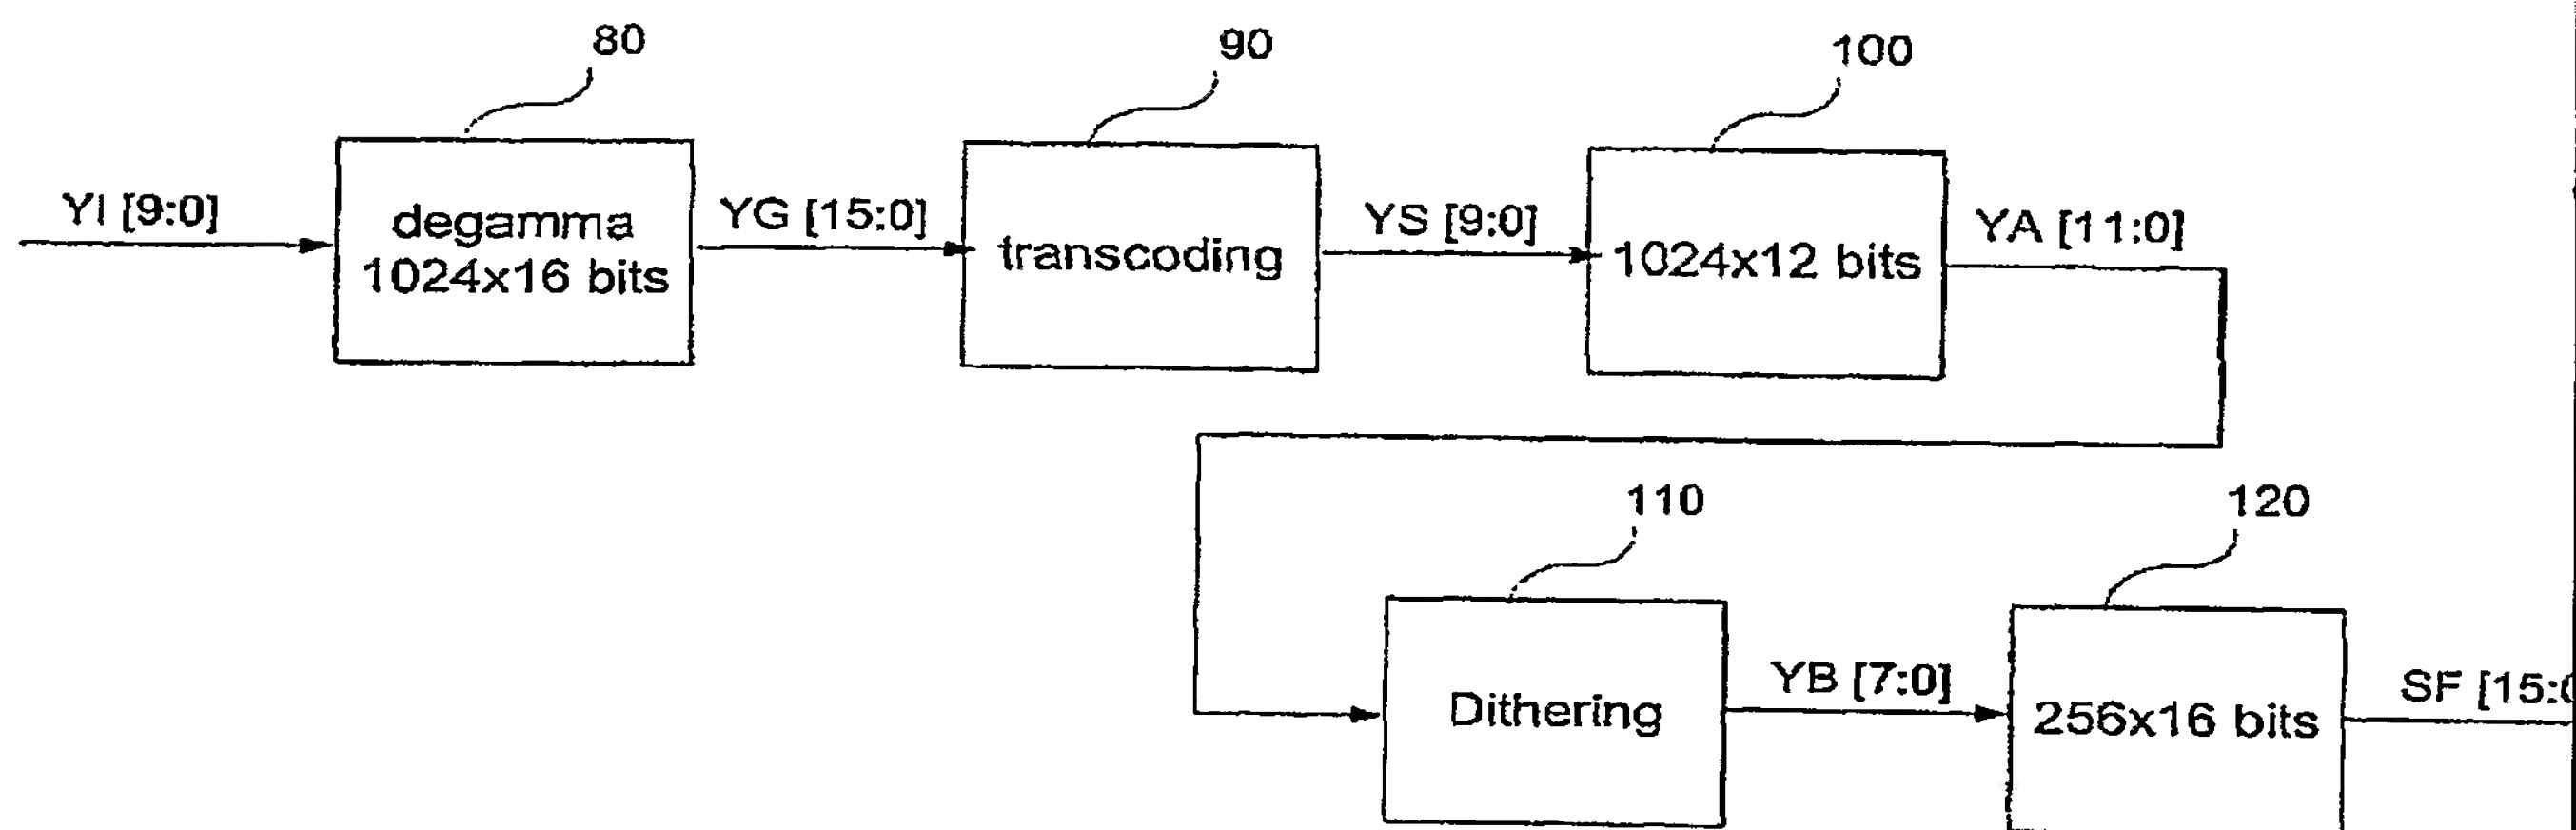


FIG.2